

RGB-DVI 300

RGB TO DVI SCALER

- RGB and HDTV component video to DVI scaling
- Selectable output rates up to 1920x1200, including HDTV 1080p/60
- Auto-Image™ setup
- Auto Input Memory
- DVI output selectable as RGB or component video
- Picture control adjustments with on-screen display
- RS-232 serial control



The Extron RGB-DVI 300 is a high performance RGB to DVI scaler that converts incoming analog component video and RGBHV signals to DVI. It accepts HDTV and high resolution computer-video signals, and offers single link DVI output rates up to 1920x1200, including HDTV 1080p/60. The RGB-DVI 300 is ideal for applications where newer displays with only DVI or HDMI inputs are to be integrated into systems with analog RGB computer-video sources.



Extron® Electronics

www.extron.com

DESCRIPTION


The Extron **RGB-DVI 300** is a high performance RGB to DVI scaler that converts incoming analog component video and RGBHV signals to DVI-D signals. It accepts HDTV and high resolution computer-video signals up to 1920x1200, and offers multiple, selectable single link DVI output rates up to 1920x1200, including HDTV 1080p/60. The RGB-DVI 300 is housed in a compact, low-profile enclosure for placement behind flat-panel displays, and offers several features for streamlining integration and enhancing system operation, including Auto Input Memory, Auto-Image setup, and RS-232 serial control.

The RGB-DVI 300 is ideal for various applications where newer consumer-based displays, equipped only with DVI or HDMI inputs, are to be used with sources that output analog RGB computer-video, or in an environment with an existing analog RGB signal distribution infrastructure. It can also be used in systems where consolidation of various source signals to a single, common output resolution is desired. For example, the RGB-DVI 300 can be installed at the output of a switcher, with its DVI output feeding the display.

In addition to high performance scaling, the RGB-DVI 300 includes several integrator friendly features for expediting set-up and system operation. An on-screen display facilitates display of information pertaining to the incoming signal and adjustment of picture settings, including positioning, size, zoom, brightness, contrast, and detail. Internal test patterns are available for calibration and setup. Configurations can be conveniently saved and recalled from up to three memory presets from the front panel, and up to 16 additional presets through RS-232 serial control.

With Auto Input Memory, the RGB-DVI 300 automatically stores image settings for each new incoming signal. When the signal is recognized again from a newly connected source, image settings are automatically restored. Auto-Image, a feature common to many Extron scalers and signal processors, allows for quick and easy set-up of incoming analog RGB signals.

The RGB-DVI 300 features RS-232 serial control with front and rear ports. It is housed in a 1" high, half rack width enclosure that allows for discreet installation, such as behind a flat panel display or above a projector.

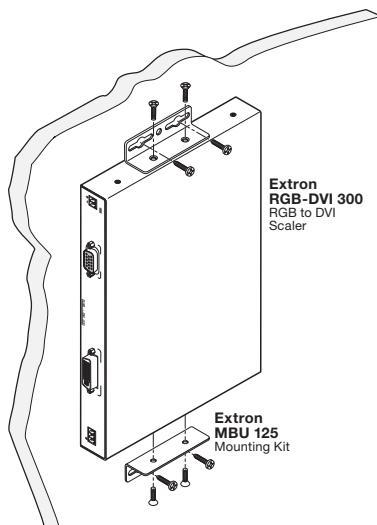

FEATURES

- **RGB and HDTV component video to DVI scaling**
- **61 selectable output rates up to 1920x1200, including HDTV 1080p/60** – The output rate can be selected manually using the on-screen menu system or via RS-232 serial control. It can also be automatically selected based on the display EDID, or set to match the incoming signal rate.
- **Auto-Image setup** – For expedited presentation set-up, the RGB-DVI 300 automatically optimizes the image by analyzing and then adjusting to the incoming source, eliminating complex and time-consuming set-up procedures.
- **Auto Input Memory** – When activated, the RGB-DVI 300 automatically stores size, position, contrast, brightness, and detail information based on the incoming signal. When the same signal is detected again, these image settings are automatically recalled from memory.
- **DVI output selectable as RGB or component video**
- **Picture controls for brightness, contrast, detail, and horizontal and vertical positioning, sizing, and zoom**
- **Memory presets** – Three memory presets are available to store and recall sizing, centering, detail, contrast, and brightness information. An additional 16 memory presets are available via RS-232 serial control.
- **On-screen display** – The RGB-DVI 300 features an on-screen display which displays status information pertaining to the currently selected input, and facilitates easy adjustment of picture settings.
- **RS-232 serial control port** – Using serial commands, the RGB-DVI 300 can be controlled and configured via the Extron Windows®-based control program, or integrated into third-party control systems. Extron products use the SIS™ - Simple Instruction Set command protocol, a set of basic ASCII code commands that allow for quick and easy programming.
- **Internal test patterns for calibration and setup** – Nine test patterns are available, including a crop pattern, color bars, alternating pixels, and four film aspect ratio patterns - 1.33, 1.78, 1.85, and 2.35.
- **Front panel security lockout** – This feature locks out all front panel functions; all functions however, are available through RS-232 control.
- **1" high, half rack width metal enclosure** – With a low profile enclosure, the RGB-DVI 300 can be discreetly installed, such as behind a plasma or LCD flat-panel display.
- **External universal power supply included** – Provides worldwide power compatibility.

VIDEO INPUT

Number/signal type	1 RGBHV
Connectors	1 female 15-pin HD
Nominal level.....	0.7 Vp-p for RGB
Minimum/maximum levels.....	Analog: 0.0 V to 2.0 Vp-p with no offset
Impedance.....	75 ohms
Horizontal frequency.....	30 kHz to 100 kHz
Vertical frequency.....	50 Hz to 120 Hz
Resolution range	640x480 to 1920x1200* or 480p, 576p, 720p, 1080i, or 1080p
NOTE: *Only the reduced blanking version of the 1920x1200 resolution is sampled at full bit rate.	
Formats.....	RGB and YCbCr
Return loss	<-30 dB @ 5 MHz

VIDEO PROCESSING

Digital sampling.....	24 bit, 8 bits per color; 162 MHz standard
Colors	16.78 million

VIDEO OUTPUT

Number/signal type	1 single link DVI-D
Connectors	1 female DVI-I (digital output only)
Scaled resolutions.....	640x480 ^{4,5,6} , 800x600 ^{4,5,6} , 852x480 ^{4,5,6} , 1024x768 ^{4,5,6} , 1024x852 ^{4,5,6} , 1024x1024 ^{4,5,6} , 1280x768 ^{4,5,6} , 1280x800 ^{4,5,6} , 1280x1024 ^{4,5,6} , 1360x765 ^{4,5,6} , 1365x768 ^{4,5,6} , 1365x1024 ^{4,5,6} , 1366x768 ^{4,5,6} , 1400x900 ^{4,5,6} , 1400x1050 ^{4,5} , 1600x1200 ^{4,5} , 1680x1050 ^{4,5} , 1920x1200 ^{4,5} , 480p ⁵ , 576p ⁴ , 720p ^{3,6} , 1080p ^{1,2,3,4,5} , 1080i ^{4,5}
	1 = at 24 Hz, 2 = at 25 Hz, 3 = at 30 Hz, 4 = at 50 Hz, 5 = 60 Hz, 6 = 75 Hz; or automatically selected resolution based on display EDID data; or locked to the input's resolution and refresh rate
Formats.....	RGB and YCbCr digital video

SYNC

Input type.....	RGBHV
Output type.....	DVI-D or HDMI digital video
Standards.....	SMPTE 259M, SMPTE 929, SMPTE 372, DVI 1.0, HDMI 1.2
Input level.....	0 V to 5.0 Vp-p
Input impedance.....	1k ohms

CONTROL/REMOTE— DECODER

Serial control ports	1 RS-232, 3.5 mm captive screw connector, 3 pole (rear panel) 1 RS-232, 2.5 mm mini stereo jack (front panel)
Baud rate and protocol	9600 baud, 8 data bits, 1 stop bit, no parity
Program control.....	Extron's control/configuration program for Windows® Extron's Simple Instruction Set (SIS™)

GENERAL

External power supply.....	100 VAC to 240 VAC, 50/60 Hz, external; to 12 VDC, 2 A, regulated
Power input requirements.....	12 VDC, 0.8 A

Temperature/humidity	Storage -40° to +158°F (-40° to +70°C) / 10% to 90%, noncondensing Operating +32° to +122°F (0° to +50°C) / 10% to 90%, noncondensing
Cooling.....	Convection, no vents
Mounting	
Rack mount.....	Yes, with optional 1U, 9.5" deep rack shelf (RSU 129, #60-190-01; RSB 129, 60-604-01); or 1U, 6" deep rack shelf (RSU 126, #60-190-10; RSB 126, 60-604-10)
Furniture mount.....	Furniture or wall mountable using optional MBU 125 mounting kit, part #70-077-01
Enclosure type.....	Metal
Enclosure dimensions.....	1.0 H x 8.75" W x 6.0" D (half rack wide) (2.5 cm H x 22.2 cm W x 15.2 cm D) (Depth excludes connectors and knobs.)
Product weight	1.6 lbs (0.7 kg)
Shipping weight.....	4 lbs (2 kg)
Vibration	ISTA/NSTA 1A in carton (International Safe Transit Association)
Regulatory compliance	
Safety.....	CE, CUL, C-tick, UL
EMI/EMC	CE, C-tick, FCC Class A, ICES, VCCI
Environmental.....	Complies with the appropriate requirements of WEEE.
MTBF	30,000 hours
Warranty.....	3 years parts and labor
NOTE: All nominal levels are at ±10%.	

Model	Version Description	Part Number
RGB-DVI 300	RGB to DVI Scaler.....	60-906-01


Optional Accessories

DVID DL Series, Dual Link DVI-D Male to Male Patch Cables		
DVID DL/3	3' (90 cm)	26-651-03
DVID DL/6	6' (1.8 m).....	26-651-06
DVID DL/12	12' (3.6 m).....	26-651-12
MBU 125	Under-Desk Mount Kit.....	70-077-01




DVID SL


APPLICATION DIAGRAM

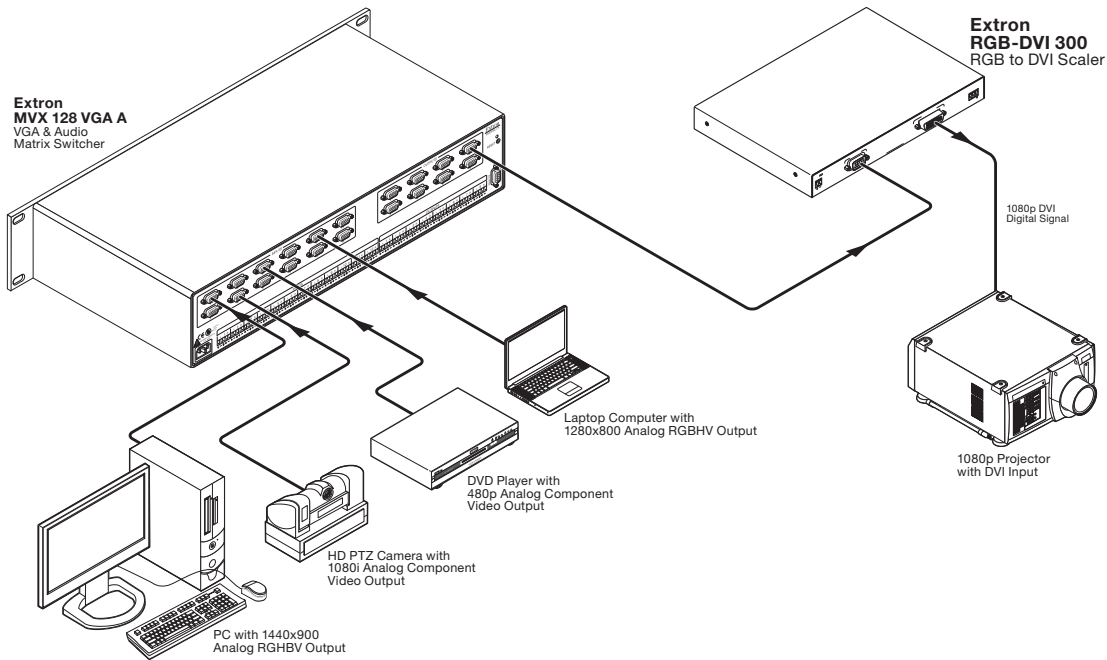

PANEL DRAWING

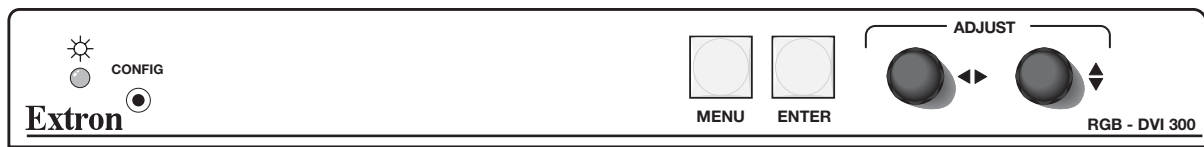

Front

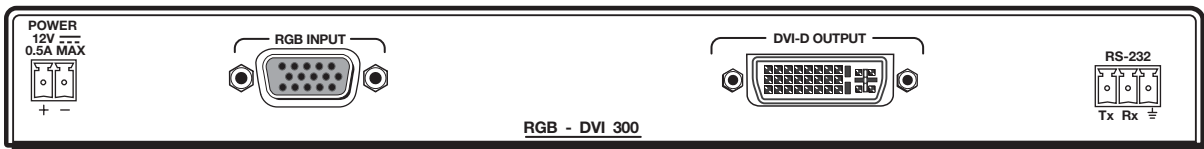

Back



Extron USA - West
Headquarters
+800.633.9876
Inside USA / Canada Only
+1.714.491.1500
+1.714.491.1517 FAX

Extron USA - East
+800.633.9876
Inside USA / Canada Only
+1.919.863.1794
+1.919.863.1797 FAX

Extron Europe
+800.3987.6673
Inside Europe Only
+31.33.453.4040
+31.33.453.4050 FAX

Extron Asia
+800.7339.8766
Inside Asia Only
+65.6383.4400
+65.6383.4664 FAX

Extron Japan
+81.3.3511.7655
+81.3.3511.7656 FAX

Extron China
+400.883.1568
Inside China Only
+86.21.3760.1568
+86.21.3760.1566 FAX

Extron Dubai
+971.4.2991800
+971.4.2991880 FAX